



**Play value**

The Play Houses with their basic furnishings like a table and benches are a stimulus to role-play for younger children. Primarily this entails mother and child games because the house with protective roof and four sheltering walls conveys the feelings and actions associated with family. The window enables supervision of the child and the door ensures the boundary to the private space. Doors, especially half doors, stimulate a variety of role-play such as shopping, post and bank activities.

**Fundamental characteristics**

- child proportions according to ergonomic requirements
- appealing design
- mixed material forms: claddings/square timber
- natural wooden surface which appeals to the senses
- sturdy, double-layer roof construction
- incentive for playing: veranda, door, furniture

**Suitable**

- for older than, but also suitable for children under 3 years
- for small children's areas of public playgrounds
- nurseries
- children's homes
- therapy institutions for children
- leisure areas
- school playgrounds



Order No. 4.10105 Smallest Playing House please refer to our catalogue „For the Very Young“

**Small Play House**  
**Small Play House with door**  
**Big Play House**  
**Big Play House with door**




Order No. 4.10110 with door

© Richter Spielgeräte GmbH 10/15

Design and Copyright



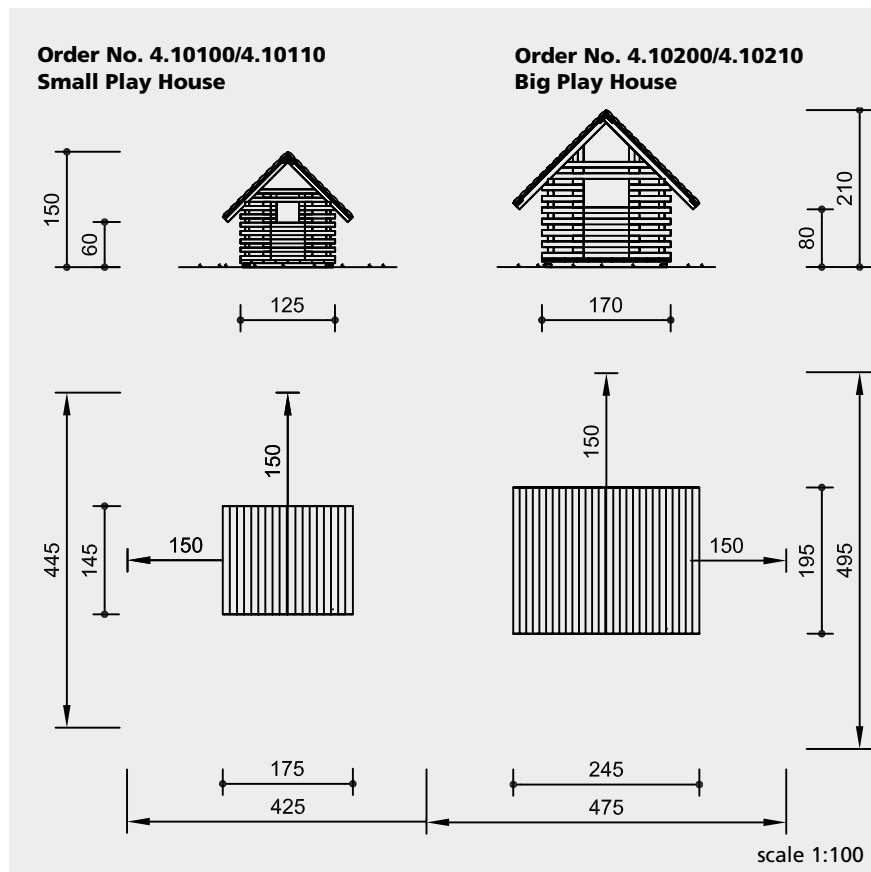

Safety check according to EN 1176

**Components**

- 1 house body, including:
  - 2 benches
  - 1 table
- 2 roof sections, double-layered
- 4 foundation irons

**Order No. 4.10110/4.10210**  
as before, but with installed door

**Installation information**

Surfacing requirements corresponding to a fall height of  $\leq 0.60$  m (please refer to price list for more detailed information)

Foundations (only necessary to immobilise the equipment)

- Order No. 4.10100/4.10110**  
4 items 30 x 30 x 30 cm  
excavation depth 40 cm
- Order No. 4.10200/4.10210**  
4 items 40 x 40 x 40 cm  
excavation depth 50 cm

**Attention:**  
**Exact measurements may vary, for all installation dimensions refer to current installation instructions.**  
Technical changes reserved.

**Technical information**

**core-free**  
sawn timbers of spruce/fir, boiler-pressure impregnated according to DIN 68800-3, use class 4, core-free, by that formation of cracks can be reduced



**claddings**  
thickness 3 - 5 cm, de-barked by hand, of spruce/fir, boiler-pressure impregnated according to DIN 68800-3, use class 4



**ground anchor**  
all parts used for anchoring to the ground made of hot-dip galvanised steel



**Order No. 4.10100/4.10110**  
**Order No. 4.10200/4.10210**  
impregnated version with double-layered roof of 21 mm boards and 3 - 5 cm thick claddings

**Order No. L4.10100/L4.10110**  
**Order No. L4.10200/L4.10210**  
version made of larch with single-layered roof of 4 - 5 cm thick, half-rebated claddings

**Dimensions**

(small deviations possible)

Order No.	4.10100	4.10200
	4.10110	4.10210
height	1.50 m	2.10 m
width	1.75 m	2.45 m
depth	1.45 m	1.95 m
weight	250 kg	500 kg

For more detailed explanation of the quality characteristics see price list.



4.10100/4.10110



4.10200/4.10210